

# Magazine Unloader Line Loader

Automatic product unloading

JOT Automation Magazine Unloader Line Loader is designed for unloading PCBs from magazines to production line.

Fast and reliable operation - high production line efficiency.



## MACHINE IDENTIFICATION

Machine name and code:  
Magazine Unloader Line Loader MAZ-1562

## STANDARD FEATURES

5 magazine buffer

Programmable magazine elevator

Programmable magazine parameters

Automatic magazine change

Pneumatic pusher

Pusher force detection

Indicator beacon

Transport direction: From left to right

SMEMA electrical interface

ESD-safe design

CE-safety compliant

## INSTALLATION REQUIREMENTS

Power supply:  
• 230 VAC / 50-60 Hz / 4 A

Compressed air connection: 0.6 MPa (87 psi)  
• Air consumption: Max. 5 l/min (0.5 cfm)

## CONTACT INFO

[www.jotautomation.com](http://www.jotautomation.com)

[www.jotautomation.com](http://www.jotautomation.com)

## TECHNICAL CHARACTERISTICS

Fixed edge: 215 mm (8.5") from back

Track height:  
• 950 ±50 mm (37.4 ±2")

Magazine conveyors:  
• Length: 2 x 700 mm (2 x 27.6")

Magazine places: 1-5 pcs

Magazine adjust time: Approx 25 seconds

Board outfeed time: Max. 5 s/board

Weight: 230, 300, or 374 kg

## PRODUCT SPECIFICATIONS

Max. PCB width 470 mm (18.5")

Max. PCB length 457 mm (18.0")

Max. PCB weight: 2 kg (4.4 lbs)

## OPTIONS

Transport direction: From right to left

1 Magazine place


3 Magazine places

North America model (110 V)

Safety hatch

Safety door

**JOT**  
automation

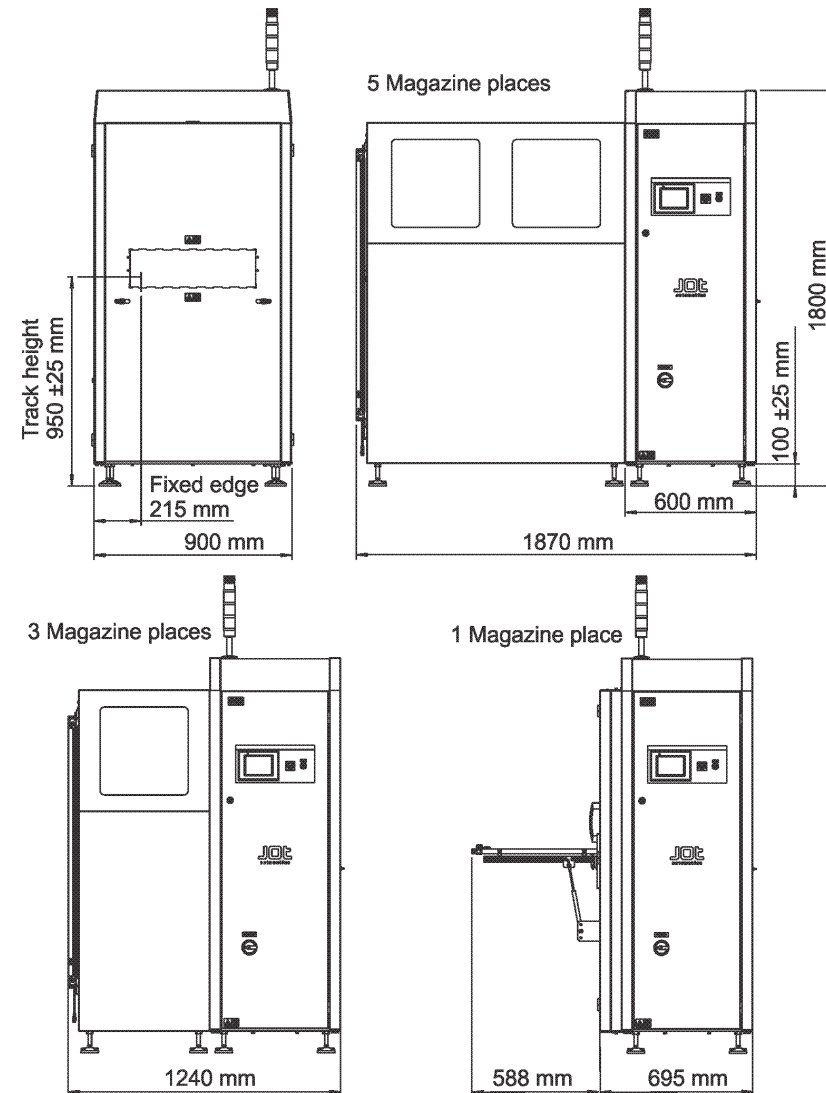

Magazine Unloader Line Loader MAZ-1562 Datasheet

© Copyright JOT Automation Ltd. All Rights Reserved.